



QUAD CAB 2500 160.5"WB BOX OFF 4X2

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

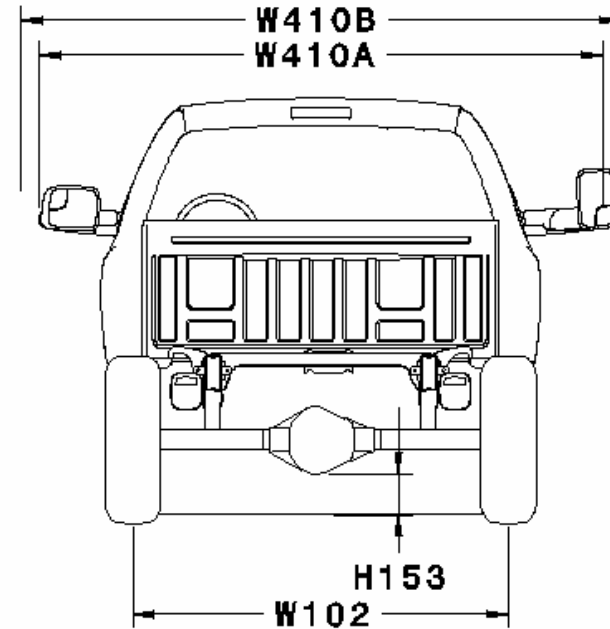

PLAN VIEW

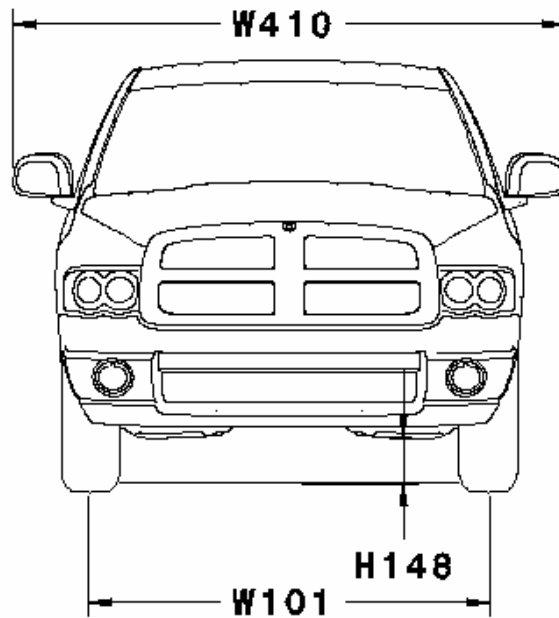

SIDE VIEW



CHARTS

 [Site Map](#)

 [Main Menu](#)


 [Ram Home](#)

PRINT



QUAD CAB 2500 160.5"WB BOX OFF 4X2

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

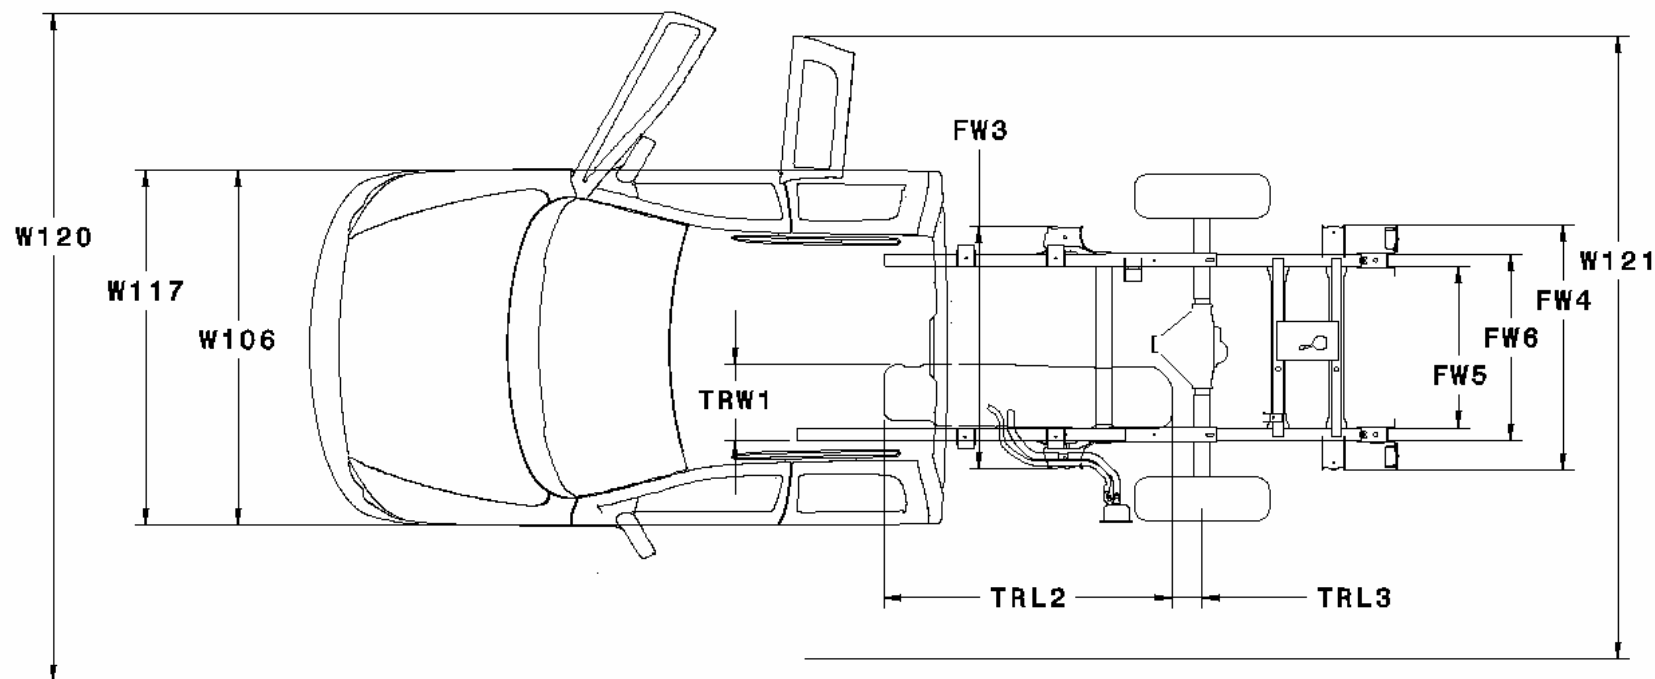

FRONT & REAR VIEW



SIDE VIEW



CHARTS

 **Site Map**

 **Main Menu**

 **Ram Home**

PRINT


 **ALL**

 **IN**

 **OUT**

QUAD CAB 2500 160.5"WB BOX OFF 4X2

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

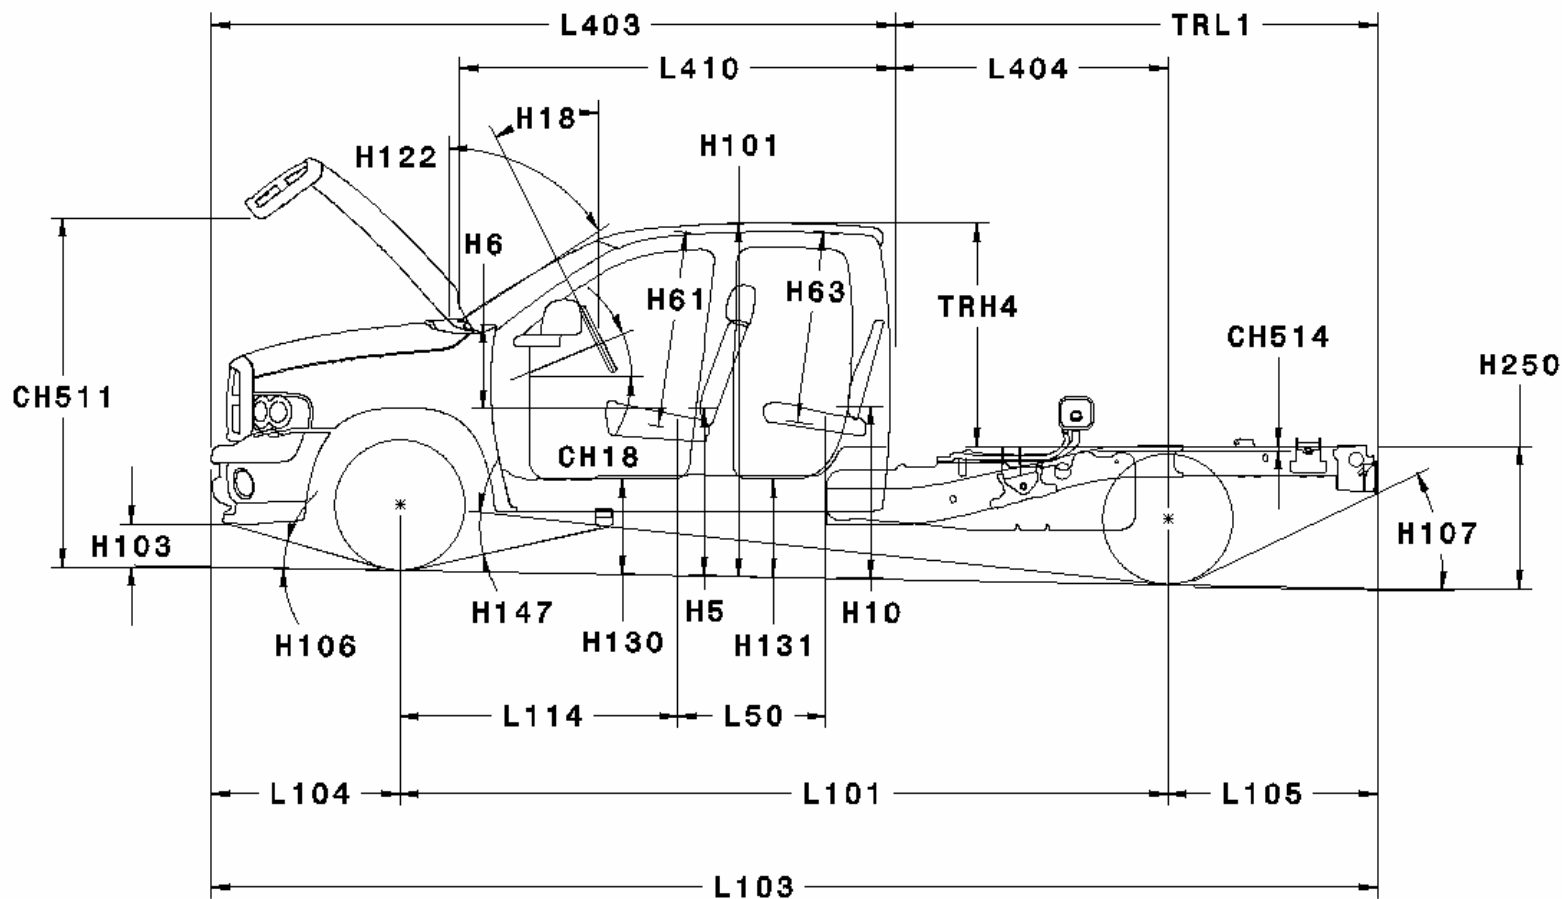

FRONT & REAR VIEW



PLAN VIEW



CHARTS

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

[PRINT](#)

[ALL](#)

[IN](#)

[OUT](#)

QUAD CAB 2500 160.5"WB BOX OFF 4X2

Code	2005 RAM QUAD CAB 2500 BOX OFF 160.5 WB	mm	in
L50	SgRP Couple distance (1-2)	787.4	31.0
L101	Wheelbase	4076.5	160.5
L103	Vehicle Length	6190.9	243.7
L104	Overhang - Front	999.7	39.4
L105	Overhang - Rear	1114.7	43.9
L114	Front Wheel to Front SgRP c/l	1474.6	58.1
L403	Front of Bumper to Back of Cab	3631.0	143.0
L404	Cab to Rear Axle	1445.2	56.9
L410	Cab Length	2312.8	91.1
TRL1	Tail Lamp to Back of Cab	2559.9	100.8
TRL2	Fuel Tank Length	1637.3	64.5
TRL3	Rear Wheel Centerline to Fuel Tank	172.3	6.8

Code	2005 RAM QUAD CAB 2500 BOX OFF 160.5 WB	mm	in
CH18	Steering Column Angle	22.9°	22.9°
CH514	Top Of Frame to Top of Fuel Tank	22.5	0.9
H6	SgRP-Front to Windshield Lwr DLO	446.2	17.6
H18	Steering Wheel Angle	26.7°	26.7°
H61	Effective Head Room Front	1037.3	40.8
H63	Effective Head Room Second	1015.4	40.0
H122	Window Slope Angle - Windshield	56.9°	56.9°
TRH4	Top of Frame to top of Cab	1184.9	46.6

Code	2005 RAM QUAD CAB 2500 BOX OFF 160.5 WB	mm	in
TRW1	Outside Rail to Fuel Tank (inside)	434.2	17.1
W106	Front Fender Width	2020.5	79.5
W117	Body Width At SgRP - Front	2020.0	79.5
W120	Vehicle Width - Front Doors Open	3805.1	149.8
W121	Vehicle Width - Rear Doors Open	3546.5	139.6
W410	Vehicle Width - Mirrors (std)	2396.2	94.3
W410A	Vehicle Width - Mirrors (opt)	2587.1	101.9
W410B	Vehicle Width - Mirrors (trailer)	2751.4	108.3
FW3	Rear Suspension Front Spring Bolt	1384.8	54.5
FW4	Rear Suspension Rear Spring Bolt	1397.9	55.0
FW5	Rear Frame - Inside Width	922.0	36.3
FW6	Rear Frame - Outside Width	1062.0	41.8



TIRE CHART



FRONT & REAR VIEW



PLAN VIEW



SIDE VIEW

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

PRINT

ALL

IN

OUT

QUAD CAB 2500 160.5"WB BOX OFF 4X2

Code	2005 RAM QUAD CAB 2500 BOX OFF 4X2 160.5 WB	LT245/70R17		LT265/70R17	
		mm	in	mm	in
CH511	Bottom of Open Hood to Ground	1871.9	73.7	1879.2	74.0
CHR22	Turn Circle Diameter(feet/meters)*		50.3 ft		50.3 ft
H5	SgRP- Front to Ground	896.7	35.3	908.0	35.7
H10	SgRP - Second to Ground	923.1	36.3	935.8	36.8
H101	Vehicle Height (curb Load)	1887.9	74.3	1900.0	74.8
H103	Front Bumper to Ground (curb wt.)	248.1	9.8	255.2	10.0
H106	Angle of Approach	16.2	16.2	16.7	16.7
H107	Angle of Departure	26.4	26.4	27.4	27.4
H130	Step Height - Front(curb weight)	519.4	20.4	530.1	20.9
H131	Step Height - Second(curb weight)	532.9	21.0	545.1	21.5
H147	Ramp Breakover Angle	15.1	15.1	15.9	15.9
H148	Suspension or Axle to Ground - Front	190.3	7.5	198.9	7.8
H153	Suspension or Axle to Ground - Rear	180.2	7.1	188.8	7.4
H250	Top Of Rear Frame to Ground	753.0	29.6	770.9	30.4
W101	Tire Track - front	1742.4	68.6	1742.4	68.6
W102	Tire Track - rear	1731.5	68.2	1731.5	68.2

 **CHART**

 **Site Map**

 **Main Menu**

 **Ram Home**

PRINT

 **ALL**

 **IN**

 **OUT**