



REGULAR CAB 3500 140.5"WB BOX OFF 4x4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

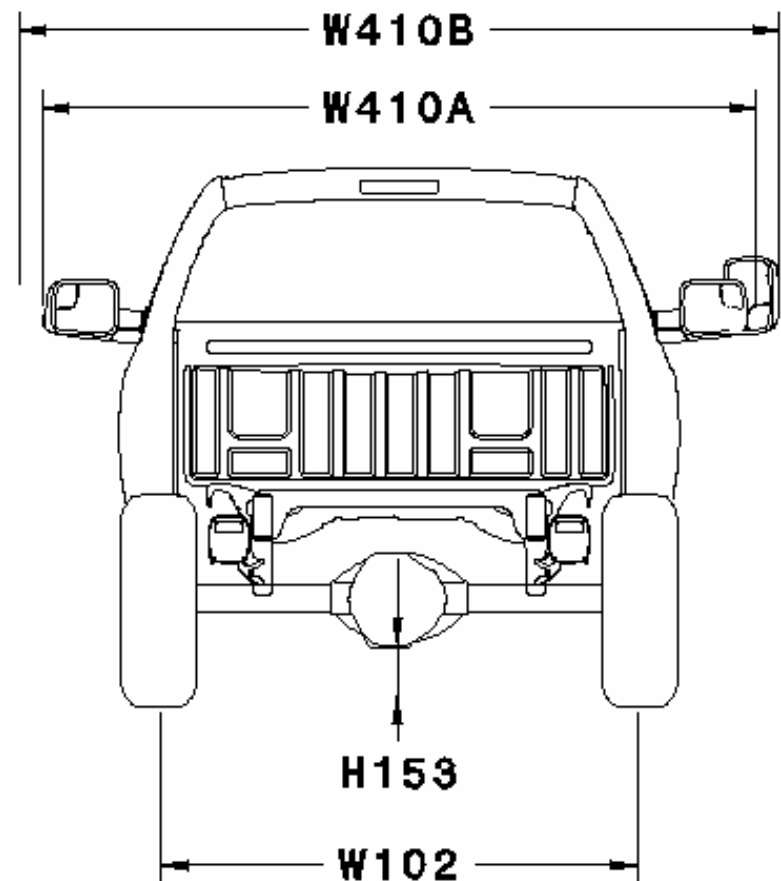

PLAN & SIDE VIEW

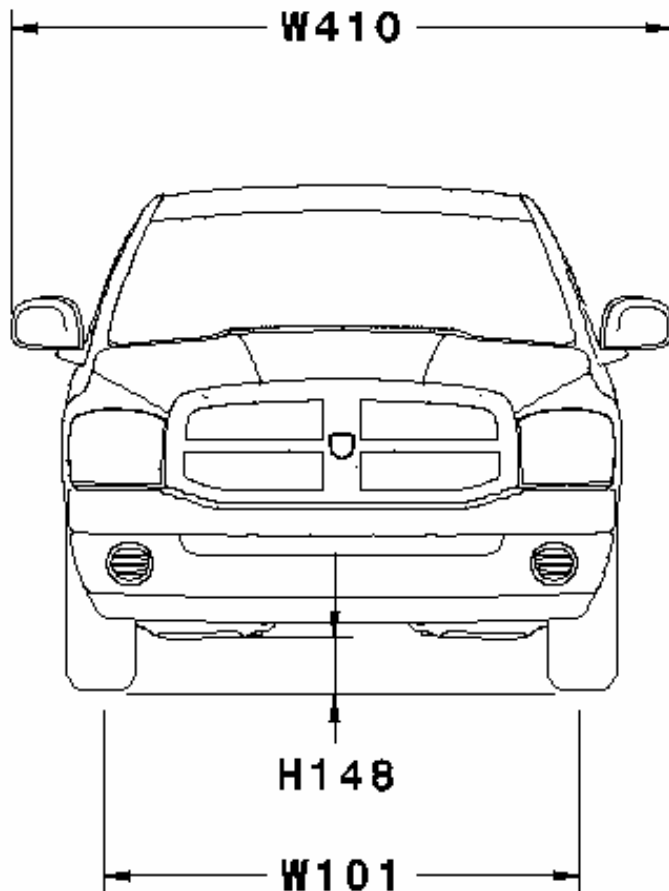

CHARTS

Site Map

Main Menu

Ram Home

PRINT


ALL

IN

OUT

REGULAR CAB 3500 140.5"WB BOX OFF 4X4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

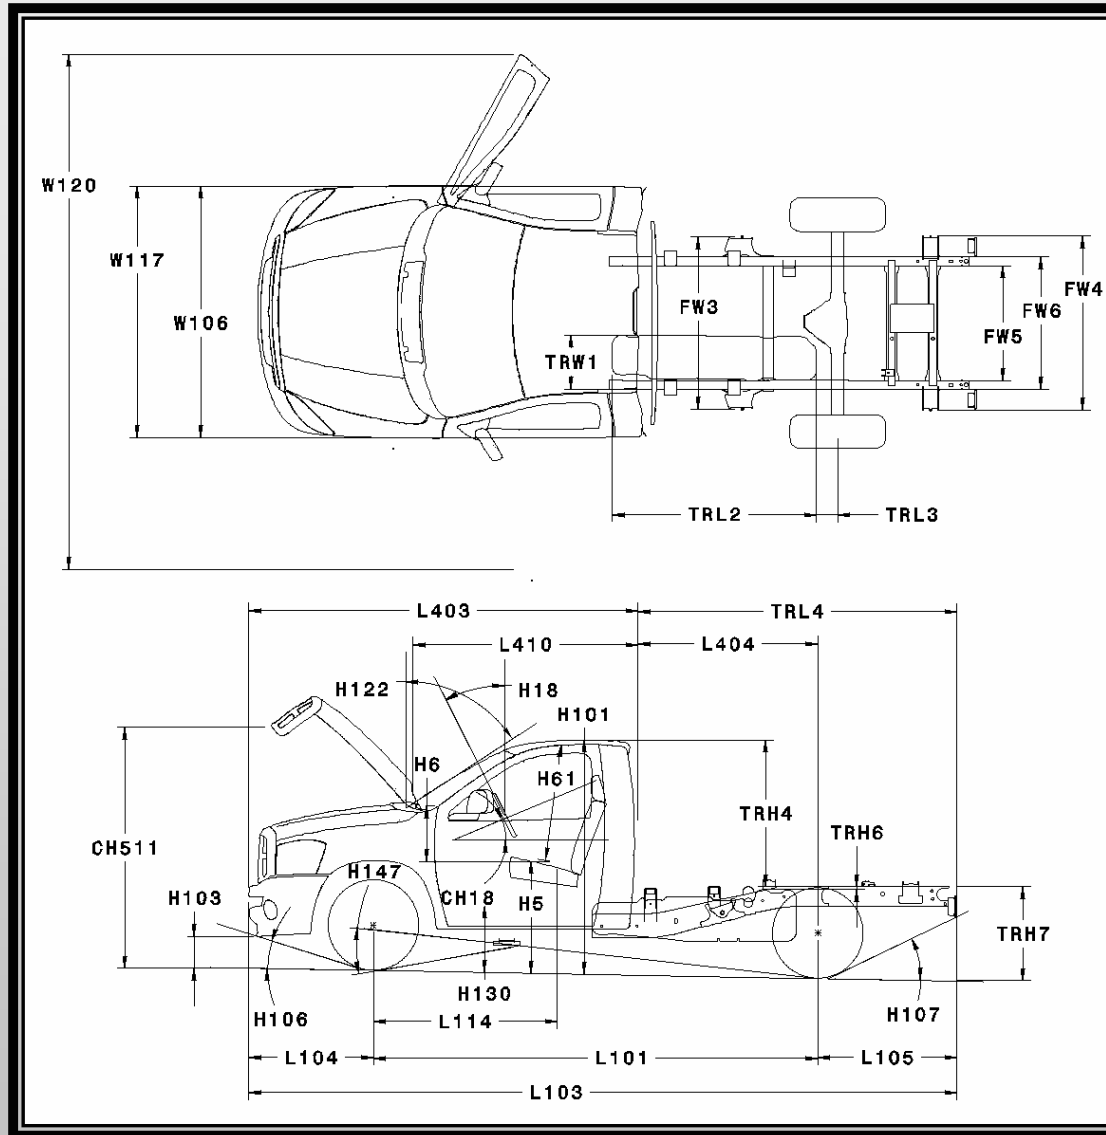

FRONT & REAR VIEW



CHARTS

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

[PRINT](#)

[ALL](#)

[IN](#)

[OUT](#)

REGULAR CAB 3500 140.5"WB BOX OFF 4X4

Code	RAM REG CAB 3500 BOX OFF 140.5WB	Metric	English
L103	Vehicle Length	5682.1 mm	223.7 in
L403	Front of Bumper to Back of Cab	3122.2 mm	122.9 in
L410	Cab Length	1806.1 mm	71.1 in
TRL2	Fuel Tank Length	1637.3 mm	64.5 in
TRL3	Rear Wheel Center line to Fuel Tank	171.6 mm	6.8 in
TRL4	Back of Cab to Taillamp	2559.9 mm	100.8 in

Code	RAM REG CAB 3500 BOX OFF 140.5WB	Metric	English
CH18	Steering Column Angle	22.9 deg	22.9 deg
H6	SgRP-Front to Windshield Lower DLO	446.2 mm	17.6 in
H18	Steering Wheel Angle	26.7 deg	26.7 deg
H61	Effective Head Room Front	1035.9 mm	40.8 in
H122	Window Slope Angle-Windshield	56.9 deg	56.9 deg
TRH4	Top of Frame to top of Cab	1175.3 mm	46.3 in
TRH6	Top of Frame to Top of Fuel Tank	22.5 mm	0.9 in

Code	RAM REG CAB 3500 BOX OFF 140.5WB	Metric	English
TRW1	Outside Rail to Fuel Tank(inside)	434.2 mm	17.1 in
W106	Front Fender Width	2020.7 mm	79.6 in
W117	Body Width At SgRP-Front	2018.9 mm	79.5 in
W120	Vehicle Width-Front Doors Open	4138.4 mm	162.9 in
W410	Vehicle Width-Mirrors(std)	2396.2 mm	94.3 in
W410A	Vehicle Width-Mirrors(opt)	2587.1 mm	101.9 in
W410B	Vehicle Width-Mirrors(trailer)	2751.4 mm	108.3 in

Code	RAM REG CAB 3500 BOX OFF 140.5WB	Metric	English
FW3	Rear Suspension Front Spring Bolt	1384.8 mm	54.5 in
FW4	Rear Suspension Rear Spring Bolt	1397.9 mm	55.0 in
FW5	Rear Frame-Inside Width	922.0 mm	36.3 in
FW6	Rear Frame-Outside Width	1062.0 mm	41.8 in



TIRE CHART



FRONT & REAR VIEW



PLAN & SIDE VIEW

Site Map

Main Menu

Ram Home

PRINT



REGULAR CAB 3500 140.5"WB BOX OFF 4X4

Code	RAM REG CAB 3500 BOX OFF 4X4 140.5WB	LT245/70R17		LT265/70R17	
		Metric	English	Metric	English
CH511	Bottom of Open Hood to Ground	2058.1 mm	81.0 in	2066.7 mm	81.4 in
CHR22	Turn Circle Diameter (feet/meters)*	14.5 m	47.5 ft	14.5 m	47.5 ft
H5	SgRP-Front to Ground	1010.0 mm	39.8 in	1018.6 mm	40.1 in
H101	Vehicle Height(curbLoad)	1986.7 mm	78.2 in	1995.3 mm	78.6 in
H103	Front Bumper to Ground(curbwt.)	379.1 mm	14.9 in	387.7 mm	15.3 in
H106	Angle of Approach	23.3 deg	23.3 deg	24.6 deg	24.6 deg
H107	Angle of Departure	30.4 deg	30.4 deg	31.4 deg	31.4 deg
H108	Static Load-Tire Radius-Front*	363.5 mm	14.3 in	372.1 mm	14.6 in
H109	StaticLoad-Tire Radius-Rear*	363.5 mm	14.3 in	372.1 mm	14.6 in
H130	Step Height - Front(curbweight)	642.5 mm	25.3 in	651.1 mm	25.6 in
H147	Ramp Breakover Angle	23.8 deg	23.8 deg	25.2 deg	25.2 deg
H148	Suspension or Axel to Ground-Front	196.5 mm	7.7 in	205.1 mm	8.1 in
H153	Suspension or Axel to Ground-Rear	180.1 mm	7.1 in	188.7 mm	7.4 in
L101	Wheelbase	3563.7 mm	140.3 in	3563.7 mm	140.3 in
L104	Overhang-Front	1002.0 mm	39.4 in	1002.0 mm	39.4 in
L105	Overhang-Rear	1116.5 mm	44.0 in	1116.5 mm	44.0 in
L114	Front Wheel to Front SgRP c/l	1471.6 mm	57.9 in	1471.6 mm	57.9 in
L404	Cab to Rear Axle	1443.4 mm	56.8 in	1443.4 mm	56.8 in
TRH7	Top of Frame(at rear) to Ground	848.3 mm	33.4 in	856.9 mm	33.7 in
TRL3	Rear Wheel Center line to Fuel Tank	170.5 mm	6.7 in	170.5 mm	6.7 in
W101	Tire Track-front	1764.3 mm	69.5 in	1764.3 mm	69.5 in
W102	Tire Track-rear	1731.5 mm	68.2 in	1731.5 mm	68.2 in



CHART

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

[PRINT](#)

[ALL](#)

[IN](#)

[OUT](#)