



REGULAR CAB 3500 140.5"WB 4x4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

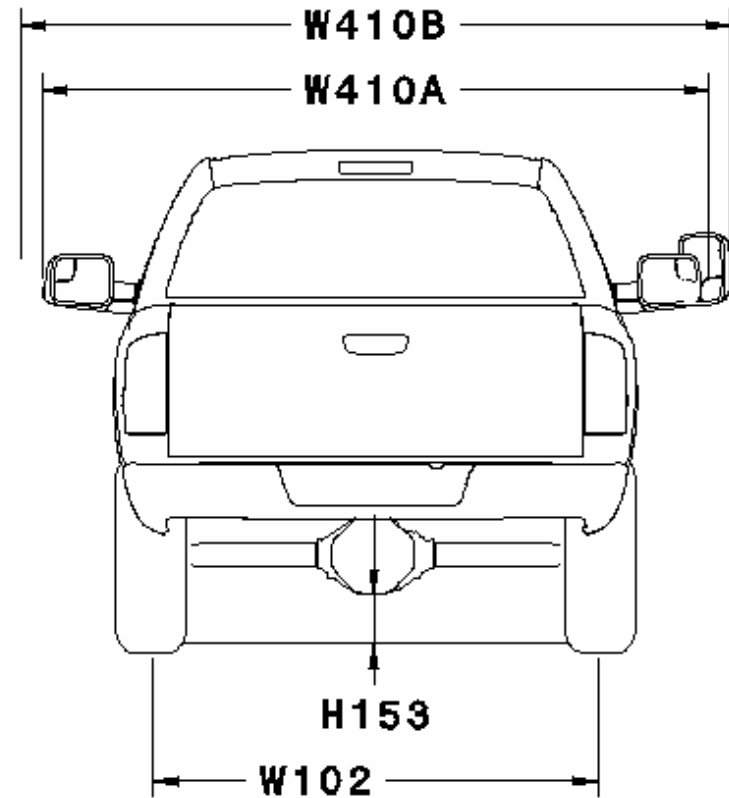

PLAN & SIDE VIEW

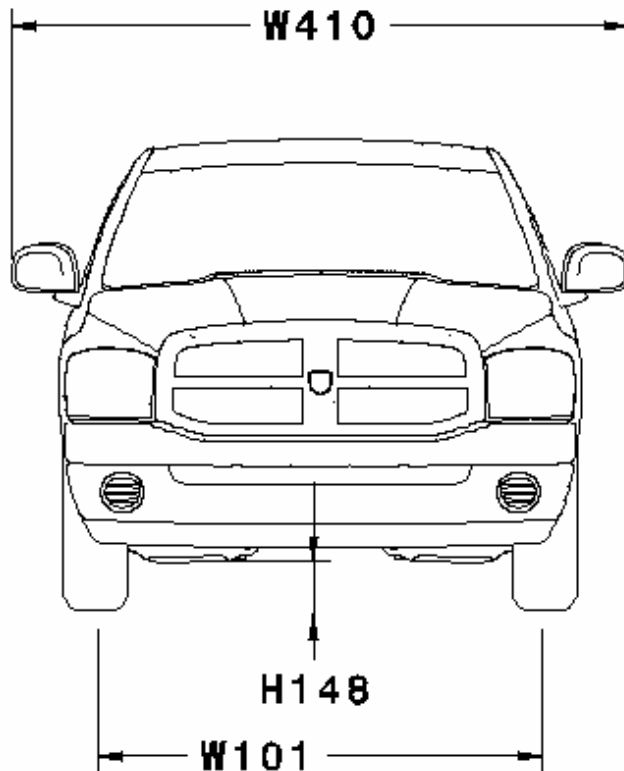

CHARTS

Site Map

Main Menu

Ram Home

PRINT


ALL

IN

OUT

REGULAR CAB 3500 140.5"WB 4x4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

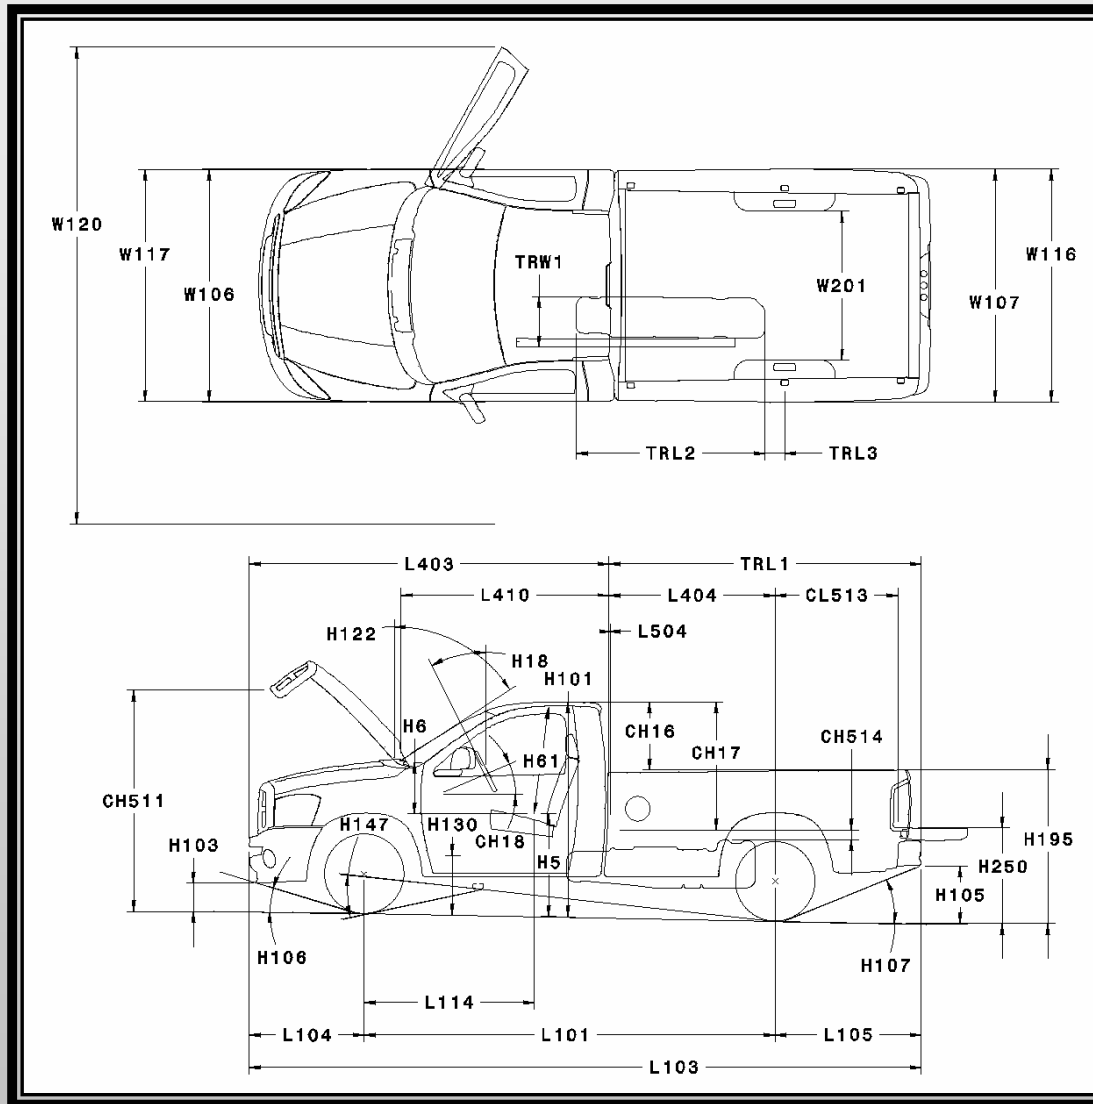

FRONT & REAR VIEW



CHARTS

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

[PRINT](#)

[ALL](#)

[IN](#)

[OUT](#)

REGULAR CAB 3500 140.5"WB 4x4

| Code | RAM REG CAB 8.0 BOX 1500 140.5WB | Metric | English |
|-------|------------------------------------|-----------|----------|
| L103 | Vehicle Length | 5834.2 mm | 229.7 in |
| L403 | Front of Bumper to Back of Cab | 3122.2 mm | 122.9 in |
| L410 | Cab Length | 1806.1 mm | 71.1 in |
| L504 | Cab to Pickup Body | 17.4 mm | 0.7 in |
| TRL1 | Rear Bumper to Back of Cab | 2712.0 mm | 106.8 in |
| TRL2 | Fuel Tank Length | 1637.3 mm | 64.5 in |
| | | | |
| Code | RAM REG CAB 8.0 BOX 1500 140.5WB | Metric | English |
| CH16 | Top of Box to Cab Roof | 590.8 mm | 23.3 in |
| CH17 | Box Floor to Cab Roof | 1114.0 mm | 43.9 in |
| CH18 | Steering Column Angle | 22.9 deg | 22.9 deg |
| CH514 | Box Floor to Top of Fuel Tank | 83.8 mm | 3.3 in |
| H6 | SgRP-Front to Windshield Lower DLO | 446.2 mm | 17.6 in |
| H18 | Steering Wheel Angle | 26.7 deg | 26.7 deg |
| H61 | Effective Head Room Front | 1035.9 mm | 40.8 in |
| H122 | Window Slope Angle-Windshield | 56.9 deg | 56.9 deg |
| | | | |
| Code | RAM REG CAB 8.0 BOX 1500 140.5WB | Metric | English |
| TRW1 | Outside Rail to Fuel Tank(inside) | 437.4 mm | 17.2 in |
| W106 | Front Fender Width | 2020.7 mm | 79.6 in |
| W107 | Rear Fender Width | 2021.7 mm | 79.6 in |
| W116 | Body Width-maximum | 2021.8 mm | 79.6 in |
| W117 | Body Width At SgRP-Front | 2018.9 mm | 79.5 in |
| W120 | Vehicle Width-Front Doors Open | 4138.4 mm | 162.9 in |
| W201 | Cargo Width-Wheelhouse | 1295.4 mm | 51.0 in |
| W410 | Vehicle Width-Mirrors(std) | 2396.2 mm | 94.3 in |
| W410A | Vehicle Width-Mirrors(opt) | 2587.1 mm | 101.9 in |
| W410B | Vehicle Width-Mirrors(trailer) | 2751.4 mm | 108.3 in |



TIRE CHART



FRONT & REAR VIEW



PLAN & SIDE VIEW

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

PRINT



REGULAR CAB 3500 140.5"WB 4x4

| Code | RAM REG CAB 8.0 BOX 3500 4X4 SRW 140.5WB | LT245/70R17 | | LT265/70R17 | |
|-------|--|-------------|----------|-------------|----------|
| | | Metric | English | Metric | English |
| CH511 | Bottom of Open Hood to Ground | 2058.1 mm | 81.0 in | 2066.7 mm | 81.4 in |
| CHR22 | Turn Circle Diameter (feet/meters)* | 13.5 m | 44.2 ft | 13.5 m | 44.2 ft |
| CL513 | Rear Axle to Inside Box at Rear | 1067.2 mm | 42.0 in | 1067.2 mm | 42.0 in |
| H5 | SgRP-Front to Ground | 1010.0 mm | 39.8 in | 1018.6 mm | 40.1 in |
| H101 | Vehicle Height(curbLoad) | 1986.7 mm | 78.2 in | 1995.3 mm | 78.6 in |
| H103 | Front Bumper to Ground(curbwt.) | 379.1 mm | 14.9 in | 387.7 mm | 15.3 in |
| H105 | Rear Bumper to Ground(curbwt.) | 601.8 mm | 23.7 in | 610.4 mm | 24.0 in |
| H106 | Angle of Approach | 23.3 deg | 23.3 deg | 24.6 deg | 24.6 deg |
| H107 | Angle of Departure | 27.3 deg | 27.3 deg | 28.2 deg | 28.2 deg |
| H108 | Static Load-Tire Radius-Front* | 363.5 mm | 14.3 in | 372.1 mm | 14.6 in |
| H109 | StaticLoad-Tire Radius-Rear* | 363.5 mm | 14.3 in | 372.1 mm | 14.6 in |
| H130 | Step Height - Front(curbweight) | 642.5 mm | 25.3 in | 651.1 mm | 25.6 in |
| H147 | Ramp Breakover Angle | 23.8 deg | 23.8 deg | 25.2 deg | 25.2 deg |
| H148 | Suspension or Axel to Ground-Front | 196.5 mm | 7.7 in | 205.1 mm | 8.1 in |
| H153 | Suspension or Axel to Ground-Rear | 180.1 mm | 7.1 in | 188.7 mm | 7.4 in |
| H195 | Liftover Height | 1437.5 mm | 56.6 in | 1446.1 mm | 56.9 in |
| H250 | Open Tailgate to Ground | 931.2 mm | 36.7 in | 939.8 mm | 37.0 in |
| L101 | Wheelbase | 3565.9 mm | 140.4 in | 3565.9 mm | 140.4 in |
| L104 | Overhang-Front | 1002.0 mm | 39.4 in | 1002.0 mm | 39.4 in |
| L105 | Overhang-Rear | 1266.4 mm | 49.9 in | 1266.4 mm | 49.9 in |
| L114 | Front Wheel to Front SgRP c/l | 1471.6 mm | 57.9 in | 1471.6 mm | 57.9 in |
| L404 | Cab to Rear Axle | 1445.6 mm | 56.9 in | 1445.6 mm | 56.9 in |
| TRL3 | Rear Wheel Center line to Fuel Tank | 172.7 mm | 6.8 in | 172.7 mm | 6.8 in |
| W101 | Tire Track-front | 1764.3 mm | 69.5 in | 1764.3 mm | 69.5 in |
| W102 | Tire Track-rear | 1731.5 mm | 68.2 in | 1731.5 mm | 68.2 in |



[Site Map](#)

[Main Menu](#)

[Ram Home](#)

[PRINT](#)

ALL

IN

OUT