


# QUAD CAB 3500 160.5"WB BOX OFF 4X4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION



**PLAN & SIDE VIEW**

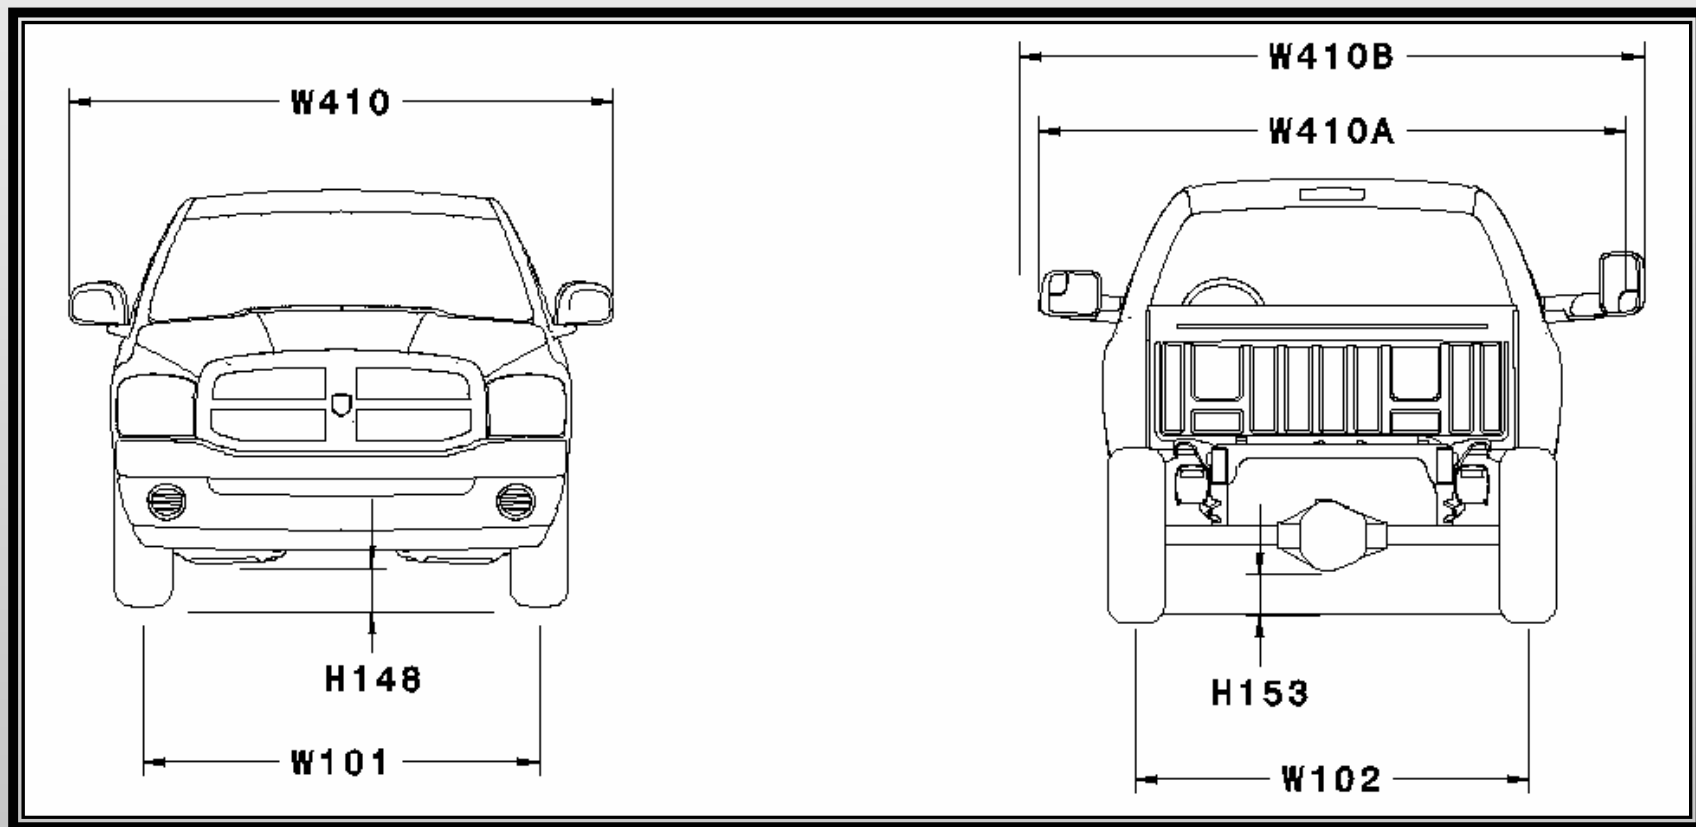

**CHARTS**

**Site Map**

**Main Menu**


**Ram Home**

**PRINT**



# QUAD CAB 3500 160.5"WB BOX OFF 4X4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

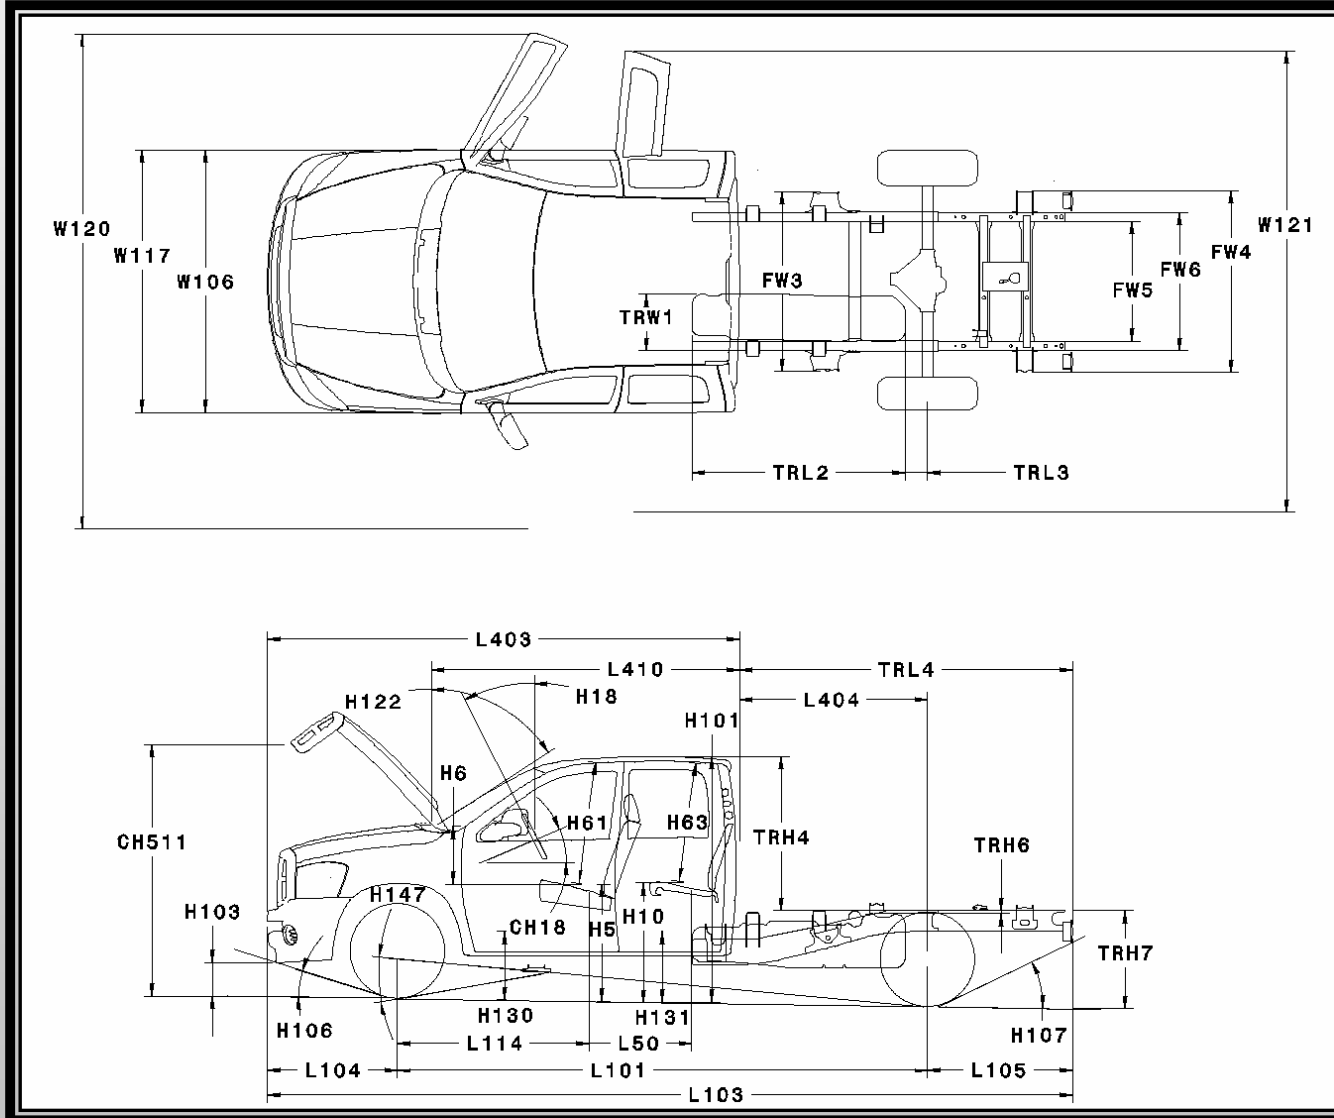

**FRONT & REAR VIEW**



**CHARTS**

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

**PRINT**

**ALL**

**IN**

**OUT**

# QUAD CAB 3500 160.5"WB BOX OFF 4X4

Code	RAM QUAD CAB 3500 SRW BOX OFF 160.5WB	Metric	English
L50	SgRP Couple distance(1-2)	787.4 mm	31.0 in
L103	Vehicle Length	6190.1 mm	243.7 in
L403	Front of Bumper to Back of Cab	3630.2 mm	142.9 in
L410	Cab Length	2368.6 mm	93.3 in
TRL2	Fuel Tank Length	1037.3 mm	64.5 in
TRL3	Rear Wheel Center line to Fuel Tank	171.8 mm	6.8 in
TRL4	Back of Cab to Taillamp	2559.9 mm	100.8 in

Code	RAM QUAD CAB 3500 SRW BOX OFF 160.5WB	Metric	English
CH18	Steering Column Angle	22.9 deg	22.9 deg
H6	SgRP-Front to Windshield Lower DLO	446.2 mm	17.6 in
H18	Steering Wheel Angle	26.7 deg	26.7 deg
H61	Effective Head Room Front	1040.9 mm	41.0 in
H63	Effective Head Room Second	1016.3 mm	40.0 in
H122	Window Slope Angle-Windshield	56.9 deg	56.9 deg
TRH4	Top of Frame to top of Cab	1184.9 mm	46.6 in
TRH6	Top of Frame to Top of Fuel Tank	22.5 mm	0.9 in

Code	RAM QUAD CAB 3500 SRW BOX OFF 160.5WB	Metric	English
TRW1	Outside Rail to Fuel Tank(inside)	434.2 mm	17.1 in
W106	Front Fender Width	2020.7 mm	79.6 in
W117	Body Width At SgRP-Front	2019.8 mm	79.5 in
W120	Vehicle Width-Front Doors Open	3805.1 mm	149.8 in
W121	Vehicle Width-Rear Doors Open	3546.5 mm	139.6 in
W410	Vehicle Width-Mirrors(std)	2396.2 mm	94.3 in
W410A	Vehicle Width-Mirrors(opt)	2587.1 mm	101.9 in
W410B	Vehicle Width-Mirrors(trailer)	2751.4 mm	108.3 in

Code	RAM QUAD CAB 3500 SRW BOX OFF 160.5WB	Metric	English
FW3	Rear Suspension Front Spring Bolt	1384.8 mm	54.5 in
FW4	Rear Suspension Rear Spring Bolt	1397.9 mm	55.0 in
FW5	Rear Frame-Inside Width	922.0 mm	36.3 in
FW6	Rear Frame-Outside Width	1062.0 mm	41.8 in



**TIRE CHART**



**FRONT & REAR VIEW**



**PLAN & SIDE VIEW**

**Site Map**

**Main Menu**

**Ram Home**

**PRINT**

**ALL**

**IN**

**OUT**

# QUAD CAB 3500 160.5"WB BOX OFF 4X4

Code	RAM QUAD CAB 3500 SRW BOX OFF 4X4 160.5WB	LT245/70R17		LT265/70R17	
		Metric	English	Metric	English
CH511	Bottom of Open Hood to Ground	2059.3 mm	81.1 in	2067.9 mm	81.4 in
CHR22	Turn Circle Diameter (feet/meters)*	16.2 m	53.0 ft	16.2 m	53.0 ft
H5	SgRP-Front to Ground	1007.7 mm	39.7 in	1016.3 mm	40.0 in
H10	SgRP-Second to Ground	1030.4 mm	40.6 in	1039.0 mm	40.9 in
H101	Vehicle Height(curbLoad)	1996.6 mm	78.6 in	2005.2 mm	78.9 in
H103	Front Bumper to Ground(curbwt.)	380.5 mm	15.0 in	389.1 mm	15.3 in
H106	Angle of Approach	24.1 deg	24.1 deg	24.6 deg	24.6 deg
H107	Angle of Departure	30.8 deg	30.8 deg	31.3 deg	31.3 deg
H108	Static Load-Tire Radius-Front*	363.5 mm	14.3 in	372.1 mm	14.6 in
H109	StaticLoad-Tire Radius-Rear*	363.5 mm	14.3 in	372.1 mm	14.6 in
H130	Step Height - Front(curbweight)	641.1 mm	25.2 in	649.7 mm	25.6 in
H131	Step Height - Second(curbweight)	654.4 mm	25.8 in	663.0 mm	26.1 in
H147	Ramp Breakover Angle	23.0 deg	23.0 deg	23.6 deg	23.6 deg
H148	Suspension or Axel to Ground-Front	196.5 mm	7.7 in	205.1 mm	8.1 in
H153	Suspension or Axel to Ground-Rear	180.1 mm	7.1 in	188.7 mm	7.4 in
L101	Wheelbase	4071.7 mm	160.3 in	4071.7 mm	160.3 in
L104	Overhang-Front	1002.0 mm	39.4 in	1002.0 mm	39.4 in
L105	Overhang-Rear	1116.5 mm	44.0 in	1116.5 mm	44.0 in
L114	Front Wheel to Front SgRP c/l	1471.6 mm	57.9 in	1471.6 mm	57.9 in
L404	Cab to Rear Axle	1443.4 mm	56.8 in	1443.4 mm	56.8 in
TRH7	Top of Frame(at rear) to Ground	846.6 mm	33.3 in	855.2 mm	33.7 in
TRL3	Rear Wheel Center line to Fuel Tank	170.5 mm	6.7 in	170.5 mm	6.7 in
W101	Tire Track-front	1764.3 mm	69.5 in	1764.3 mm	69.5 in
W102	Tire Track-rear	1731.5 mm	68.2 in	1731.5 mm	68.2 in


[● Site Map](#)
[● Main Menu](#)
[● Ram Home](#)
[PRINT](#)

ALL

IN

OUT